

Datasheet

DGLP-TWLC - Wiegand Proximity Reader

Product Description

The DGLP-TWLC is a weather resistant panel mount proximity reader.

Its small and round profile makes it ideal for retrofit installation and connection is easily done. The read range of this proximity reader is up to a maximum of 5 cm.

The polycarbonate design makes it a durable solution for multiple applications, whether indoors or outdoors. This proximity reader can be fully integrated with ATRIUM waccess control systems.



Key Features

- Robust polycarbonate housing
- Sealed in epoxy
- Weather resistant thanks to its resin mould
- Flush mount
- Audible and visual feedback
- Multicoloured LEDs

 **Green**
Access Granted


 **Red**
Access Denied

 Certification

 DEEE


RoHS Certification

 IP64

 -25°C to 55°C

Product Specifications

Material:	Polycarbonate
Mounting:	Flush mount
Technology:	Wiegand 26, 30 or 44 bits
Frequency:	125 kHz
Security level:	Standard
Read range:	Up to 5 cm
Weight:	0.17 kg

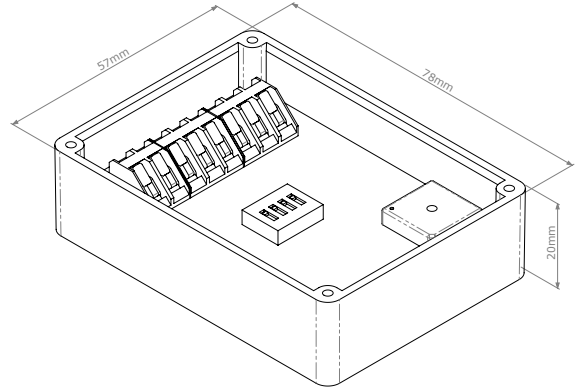

Electrical Specifications

Power input:	12 VDC
Consumption:	100 mA
Connection	8-core cable 0.6mm

