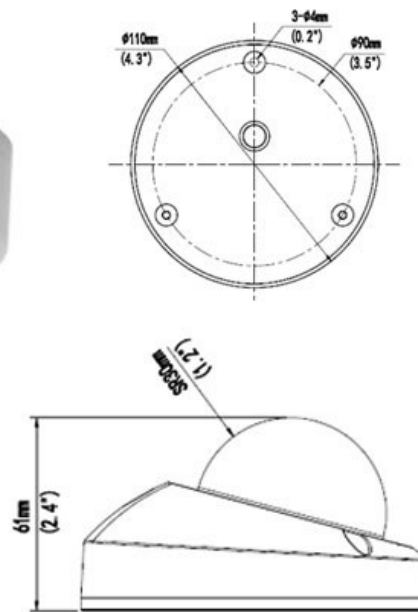


CP- VNC-V41L1C-VMD**4 MP WDR IR Vandal Dome Camera - 15Mtr.****Main Features**

- 1/3" 4MP PS CMOS Image Sensor
- Max: 20 fps@4MP(2592×1520)
- Ultra H.265, H.265, H.264, MJPEG Triple-stream encoding
- WDR(120dB), Day/Night (ICR), 2D/3D-DNR, Corridor Mode, Digital Defog, ROI, AWB, AGC, BLC
- 2.8mm Lens (3.6mm Optional)
- IR Range of 15Mtrs, Micro SD Card, IP67, IK10, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS

**Instastream**

CP- VNC-V41L1C-VMD

4 MP WDR IR Vandal Dome Camera - 15Mtr.

Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 DORI Distance
 Angle of View
 Gain Control (AGC)
 BLC
 S/N Ratio
 Video Compression
 Video Streaming
 Resolution
 Frame Rate
 Privacy Mask
 ICR
 ROI
 Audio Compression
 Audio Input
 Audio Output
 Audio
 Protocol
 Network Storage
 Ethernet
 OSD
 IR
 Micro SD
 Operating Temperature
 Humidity

Specification

1/3" 4MP Progressive scan CMOS
 Colour: 0.03Lux (F2.0, AGC ON) 0Lux with IR
 Auto/Manual, 1~1/100000 s
 Auto/Manual
 2.8mm Lens (3.6mm Optional)
 2.8mm– 63 Detect (m) , 25.2 Observe (m), 12.6 Recognize (m), 6.3 Identify (m)
 3.6mm– 81 Detect (m) , 32.4 Observe (m), 16.2 Recognize (m), 8.1 Identify (m)
 2.8mm- 104.4° (H), 54.4° (V), 135.7° (O), 3.6mm- 76.8° (H), 44.1° (V), 99.8° (O)
 Auto/Manual
 BLC/HLC/WDR(120dB)
 >55dB
 Ultra H.265, H.265, H.264, MJPEG
 Triple
 2592 × 1520
 Main Stream: 4MP (2592x1520), Max 20fps; 4MP (2560x1440), Max 25fps; 3MP (2048x1520),
 Max 30fps; Sub Stream: 2MP (1920x1080), Max 30fps; Third Stream: D1 (720x576), Max 30fps
 Up to 8 areas
 IR-cut filter with auto switch (ICR)
 Up to 8 areas
 G.711
 impedance 35 kΩ; amplitude 2 V [p-p]
 impedance 600 Ω; amplitude 2 V [p-p]
 Built-in Mic
 IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP,
 UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, ONVIF (Profile S, Profile G, Profile T), API
 ANR, NAS(NFS)
 1 RJ45 10M/100M Base-TX Ethernet
 Up to 8 OSDs
 IR Range of 15 Mtr.
 Micro SD, Up to 256GB
 -35°C ~ 60°C (-31°F ~ 140°F)
 ≤ 95% RH (non-condensing)

 **CP- VNC-V41L1C-VMD****4 MP WDR IR Vandal Dome Camera - 15Mtr.****Feature**

Power Source

Power Consumption

Weatherproof Standard

Casing

Dimension

Weight

Specification12 V DC $\pm 25\%$, or PoE (IEEE802.3 af)

4.5W

IP67 & IK10

Metal + Plastic

 $\Phi 110 \times 61$ mm ($\Phi 4.3'' \times 2.4''$)

0.25 kg