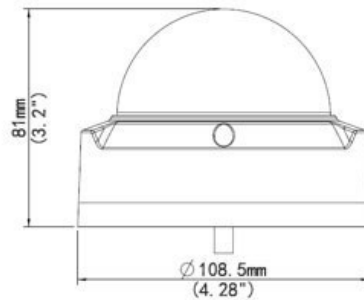
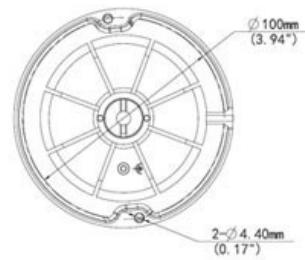


CP- VNC-V51R3-VMD**5 MP Full HD WDR Array Vandal Dome Camera - 30Mtr.****Main Features**

- 1/2.7" 5MP PS CMOS Image Sensor
- 5MP(2592 x 1944): Max. 25 fps
- Ultra 265,H.265, H.264, MJPEG Triple-stream Encoding
- WDR(120dB), Day/Night (ICR), 2D/3D-DNR,Corridor mode, ROI, Digital defog, AWB, AGC, BLC, HLC
- 2.8mm lens (3.6mm optional)
- Array Range of 30 Mtrs, Smart IR, Micro SD Card, IP67, IK10, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS

**InstaStream**

CP- VNC-V51R3-VMD

5 MP Full HD WDR Array Vandal Dome Camera - 30Mtr.

Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 S/N Ratio
 Video Compression
 Angle of View
 DORI Distance
 Back Light Compensation
 Video Streaming
 Resolution
 Frame Rate
 Motion detection
 Privacy Mask
 Dewarping
 ICR
 ROI
 Audio Input
 Audio Output
 Audio Compression
 Audio
 Alarm IN
 Alarm Out
 Protocol
 Network Storage
 Ethernet

Specification

1/2.7" 5MP Progressive scan CMOS
 Colour: 0.005Lux (F1.6, AGC ON) 0 Lux with IR
 Auto/Manual, 1~1/100000 s
 Auto/Manual
 2.8mm (3.6mm Optional)
 Auto/Manual
 >55dB
 Ultra 265,H.265, H.264, MJPEG
 2.8mm- 105.75°(H), 69.5° (V), 136.8° (O) ; 3.6mm- 79.7° (H), 51.8° (V), 98.1° (O)
 2.8mm- 63 Detect (m) , 25.2 Observe (m), 12.6 Recognize (m), 6.3 Identify (m)
 3.6mm- 90 Detect (m) , 36 Observe (m), 18 Recognize (m), 9 Identify (m)
 BLC / HLC / WDR(120dB)
 Triple
 2592 x 1944
 Main Stream: 5MP (2592x1944), Max 20fps; 5MP (2592x1944), Max 25fps (WDR OFF); 4MP (2560x1440), Max 30fps; 3MP (2048x1536), Max 30fps; 2MP (1920x1080), Max 30fps;
 Sub Stream: 2MP (1920x1080), Max 30fps; Third Stream: D1 (720x576), Max 30fps
 Up to 4 areas
 Up to 8 areas
 Support
 IR-cut filter with auto switch (ICR)
 Up to 8 areas
 2 Ch. : impedance 35 kΩ; amplitude 2 V [p-p]
 1 Ch. : impedance 600 Ω; amplitude 2 V [p-p]
 G.711
 Two way Supported
 1 Ch.
 1 Ch.
 IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, ONVIF ((Profile S ,Profile G, Profile T), API ANR, NAS(NFS)
 10M/100M Base-TX Ethernet

CP- VNC-V51R3-VMD

5 MP Full HD WDR Array Vandal Dome Camera - 30Mtr.

Feature

IR
OSD
Micro SD
Casing
Operating Temperature
Humidity
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

Array Range of 30 Mtr., Smart IR
Up to 8 OSDs
Micro SD, up to 256GB
Metal + Plastic
-35°C ~ 60°C (-31°F ~ 140°F)
≤95% RH (non-condensing)
12 V DC±25%, PoE (IEEE802.3 af)
Max 5.5W
IP67 & IK10
Φ108.5mm x 81mm (Ø4.28" x 3.2")
0.45 kg