

DS-3E1526P-SI Smart Managed 24-Port Gigabit PoE Switch

Smart managed switches are developed by Hikvision, featuring easy management and maintenance. You can easily deploy, monitor and expand your video security system anytime and anywhere with our software platforms. You can view the network topology, monitor the health of the network and receive device alarms in real time, which greatly reduces the cost of network operation and maintenance.

- 24 × gigabit PoE ports, and 2 × gigabit fiber optical ports.
- IEEE 802.3at/af standard for PoE ports.
- Network topology management, alarm push, network health monitor.
- 6 kV surge protection for PoE ports.
- AF/AT camera can reach up to 300 m in extend mode.
- PoE watchdog to auto detect and restart the cameras that do not respond.
- Various layer 2 management protocols such as STP/RSTP, VLAN, link aggregation, SNMP, QoS and so on.



•

Specification

General					
Shell	Metal material				
Net Weight	2.975 kg (6.56 lb)				
Gross Weight	3.535 kg (7.79 lb)				
Dimensions (W × H × D)	140.00 mm × 44.00 mm × 221.00 mm (17.32'' × 1.73'' × 8.70'')				
Operating Temperature	0 °C to 45 °C (0 °F to 113 °F)				
Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)				
Operating Humidity	5% to 95% (no condensation)				
Relative Humidity	5% to 95% (no condensation)				
Power Supply	100 to 240 V AC, 50/60 Hz, Max. 6.3 A				
Installation Mode	Rack (equipped with mounting ears)				
Max. Power Consumption	400 W				
Power Consumption in Idle	30 W				
Surge Protection	6 kV				
Network Parameters					
Ports	24 × Gigabit PoE port,2 × Gigabit fiber optical port				
MAC Address Table	8 K				
Switching Capacity	56 Gbps				
Packet Forwarding Rate	41.66 Mpps				
Internal Cache	4.1 Mbits				
PoE Power Supply					
PoE Standard	IEEE 802.3af,IEEE 802.3at				
PoE Power Pin	End-span: 1/2(+), 3/6(-);				
PoE Port					
Max. Port Power	PoE: Ports 1 to 24				
	30 W				
Software Function	PoE Power Budget 370 W				
Software Function					
Long Range	Ports 1 to 24: up to 300 m.				
	Long range performance may vary depend on camera model or cable condition.				
Dort Isolation	Ports 1 to 24: port isolation mode to improve network security.				
Port Isolation	Ports in an isolation group cannot communicate with each other, but they can				
Do F Watchdog	communicate with ports outside the isolation group.				
PoE Watchdog	Ports 1 to 24: auto detect and restart the cameras that do not respond.				
	Link aggregation is used to aggregate multiple physical ports to form a logical port for				
Link Aggregation	load balancing, bandwidth expansion, and port protection.				
	Support static link aggregation.				
	Support 8 aggregation groups.				
	QoS is used to allocate bandwidth to different services so as to provide end-to-end				
QoS	service quality assurance. Support port-based priority configuration.				
	Support port-based priority computation. Support SP, WRR priority schedule mode.				
	Loop prevention is used to prevent the switching network from forming loops, which				
Loop Prevention	will seriously affect network communication. Disabled by default.				
	Support 802.1D STP.				
	Jupport 002.10 JTF.				



•


	VLAN is used for network scale planning and network health improvement.			
	Support 802.1Q.			
VLAN	Configurable VLAN ID from 1-4094.			
	Support Trunk, Access port mode.			
	Support Max. 4094 VLAN.			
	Support one-click activation and remote management via Hik-Partner Pro. Functions			
	supported:			
	1. Display the port rate.			
НРР	2. Display the port bandwidth utilization rate.			
nrr	3. Display topology information.			
	4. Display the alarm status.			
	5. Restart ports and devices.			
	6. Remotely upgrade the device.			
System Maintenance	Remote upgrade, default parameters recovery, logs viewing, basic network			
System Maintenance	parameters configuration, import and export configuration, time sync			
Port Pata Limiting	Port rate-limiting is used for port bandwidth adjustment to prevent network			
Port Rate-Limiting	congestion.			
	Storm control is used to prevent switch ports from being blocked by broadcast or			
Storm Control	multicast storms in the LAN, which may affect network communication.			
Storm control	Support port rate limiting based on broadcast, multicast, and unknown unicast			
	packets.			
Approval				
	FCC (47 CFR Part 15, Subpart B);			
	CE-EMC (EN 55032: 2015, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN			
EMC	50130-4: 2011 +A1: 2014, EN 55035: 2017);			
	IC (ICES-003: Issue 6);			
	RCM (ASNZS CISPR 32: 2015)			
	UL (UL 60950-1);			
Safety	CB (IEC 60950-1:2005, AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition);			
Salety	CE-LVD (EN 60950-1: 2006 + A11: 2009 +A1: 2010+A12: 2011+A2: 2013, EN 62368-1:			
	2014+A11: 2017)			
	CE-RoHS (201165EU);			
Chemistry	WEEE (201219EU);			
	Reach (Regulation (EC) No.19072006)			

Available Model


DS-3E1526P-SI



Typical Application

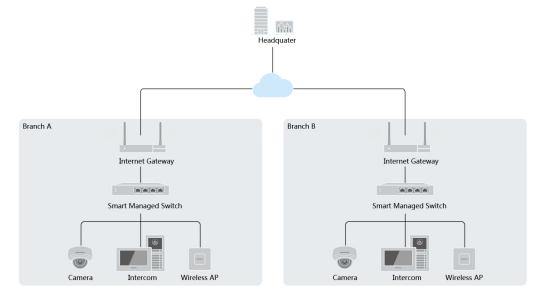



Physical Interface

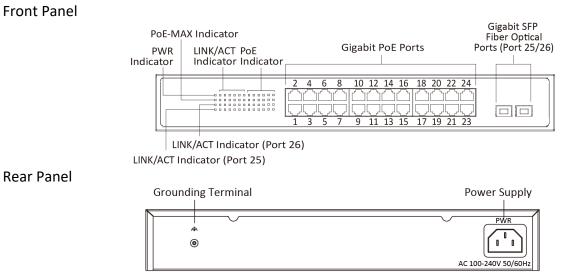



• Dimension (Unit: mm)

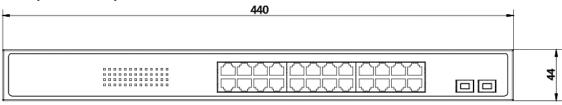

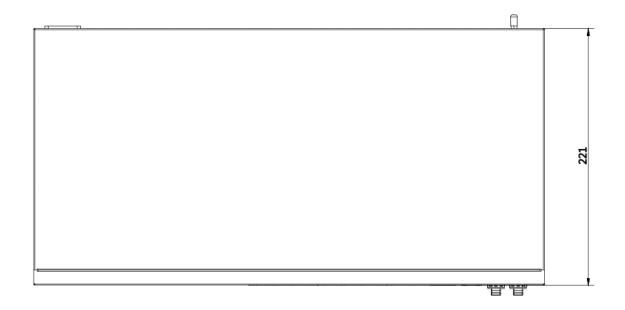



Accessory

Optional

HK-SFP-1.25G-20-1550 SFP Module	HK-SFP-1.25G-20-1310 SFP Module	HK-SFP-1.25G-1310-DF- MM SFP Module	HK-SFP-1.25G-20-1310- DF SFP Module
			the state of the s

Headquarters No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.











O hikvisionhq

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.